


enki-Sand									
Type	Flow rate (m ³ /h)			L	W	H	Connection	Weight	Price
	min	max	Backwash.	mm	mm	mm	DN	kg	Euro
ISF 20-155	19	37	56	1.800	2.050	3.300	80	5.690	
ISF 20-170	22	45	67	1.935	2.140	3.620	100	6.700	
ISF 20-190	28	56	84	2.135	2.450	3.650	100	8.150	
ISF 20-215	36	72	107	2.385	2.700	3.850	100	10.310	
ISF 20-230	41	82	123	2.530	2.900	3.900	125	11.720	
ISF 20-245	47	93	140	2.705	3.050	3.980	125	13.680	
ISF 20-255	50	101	151	2.710	3.160	4.070	125	14.600	
ISF 20-270	56	113	160	2.935	3.370	4.200	150	16.280	
ISF 20-285	63	126	185	3.110	3.520	4.270	150	17.960	
ISF 20-300	70	139	209	3.260	3.680	4.400	150	19.860	
ISF 20-320	79	156	238	3.440	4.000	4.570	200	23.250	
ISF 20-335	87	174	261	3.610	4.180	4.660	200	25.590	
ISF 20-350	95	190	285	3.750	4.340	4.740	200	27.640	
ISF 20-365	103	207	310	3.900	4.460	4.820	200	29.810	
ISF 20-380	112	224	336	4.060	4.620	4.950	200	32.150	
ISF 20-400	124	248	372	4.260	4.850	5.200	250	36.690	

Standard Features

- Operation Pressure** : 6 bar
- Operation Temp.** : 40 °C
- Material** : Carbon Steel
- Nozzle** : PP
- Media** : Gravel+Sand
- Surface Protection** : Sa 2.5 Sand Blasting+ Epoxy coating
- Design** : AD/PED
- Valve Type** : Butterfly
- Price** : Tank + Valve + Media + Front Pipe

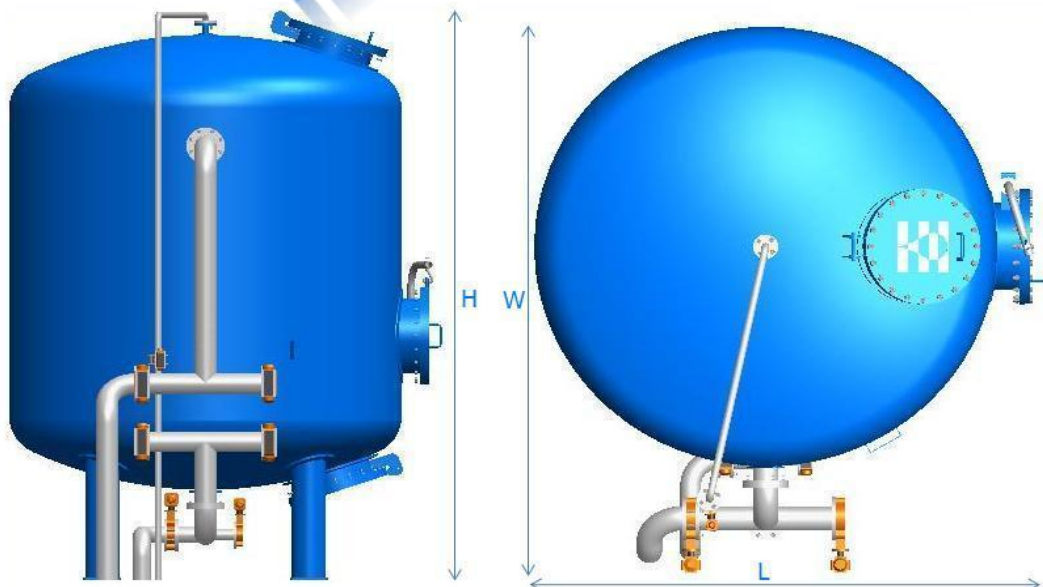

enki reserves the right to change the specifications referred to in this table at any time, without prior notice